



21.5" Touch Screen Monitor




- 21.5" TFT Full HD 1080P High-Resolution Display
- Capacitive Touch Screen
- Touch Screen Monitor for Industrial PC and cMT-FHD Server
- 1 HDMI® Input, 1 USB 2.0 Host Port


System	CPU	N/A
	Memory (RAM)	N/A
	Memory (Flash)	N/A
	RTC	N/A
I/O Ports	Serial	N/A
	LAN	N/A
	CANbus	N/A
	USB Host	1 x USB 2.0
	USB Client	1 x micro USB 2.0
	Audio	N/A
	Video	N/A
	Wi-Fi	N/A
	HDMI®	1 x HDMI® Video Input (1080P)
	SD Card Slot	N/A
Display	Display Type	21.5" TFT LCD
	Size (W x H)	18.78 x 10.59 inches [477 x 269 mm]
	Max. Resolution	1920 x 1080
	Max. Color	16.7 M
	Luminance (cd/m²)	250
	View Angle (H°/V°)	170/160
	Contrast Ratio	1000:1
	Backlight Lifetime (Hours)	30,000+
Touch Screen	Type	Tempered Glass, Capacitive type (supports 2-finger gestures)
	Hardness Scale	6H
Electrical	Input Voltage	24 ± 20% VDC
	Input Current	1.56 A @ 24 VDC
	Input Power	37.4 W
	Power Isolation	Built-in
Mechanical	Construction	Silver aluminum front bezel and chassis
	Dimensions (W x H x D)	21.50 x 13.94 x 2.21 inches [546 x 354 x 56.2 mm]
	Net Weight	Approx. 10.80 lbs. [4.9 kg]
	Mounting	Panel mounting, VESA 100 x 100
Environmental	Operating Temperature	32° ~ 122°F [0° ~ 50°C]
	Storage Temperature	-4° ~ 140°F [-20° ~ 60°C]
	Relative Humidity	10% ~ 90% (non-condensing)
	Vibration Endurance	10 to 25 Hz (X, Y, Z direction, 2G, 30 minutes)
	Rating	IP65 front panel, NEMA4X
Software	Certifications	CE, RoHS
Notes		




Top View

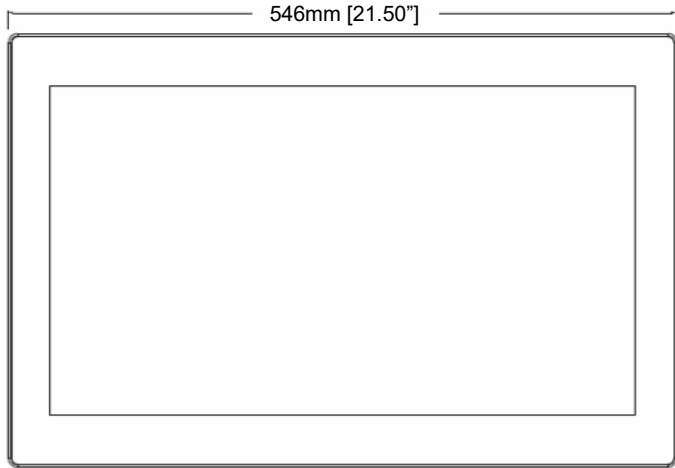


Front View

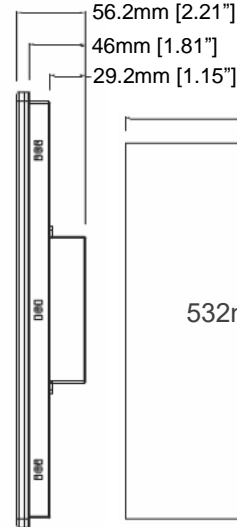

Side View

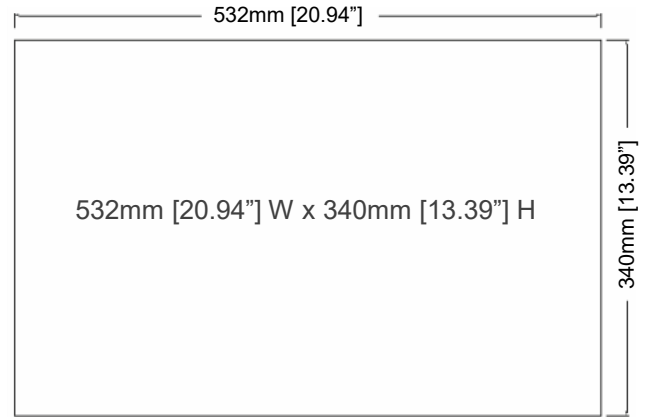

Cutout Dimensions

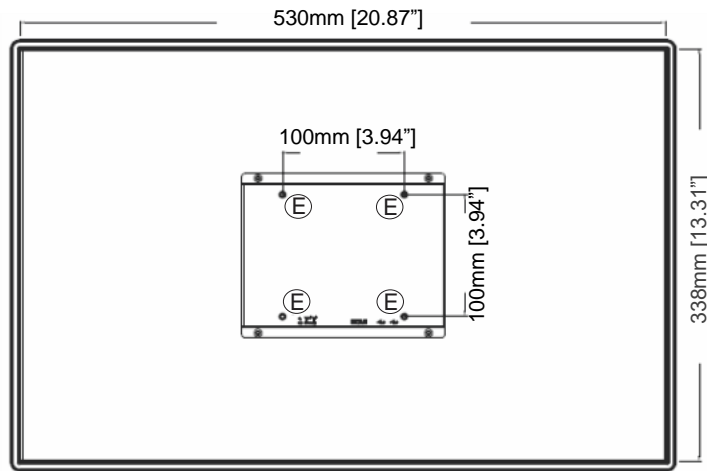

Rear View

- A Power Connector
- B HDMI® Port
- C USB 2.0 Client Port (Micro USB)
- D USB 2.0 Host Port
- E VESA 100mm Screw Holes



Bottom View